

CPS506 – Comparative Programming Languages – All Questions

– All questions as of April 12, 2022

Purpose The purpose of this document is to assist students in preparing for tests and exams.

It includes all questions previously used in the course. Many of the questions on this year's evaluations will come from this list (possibly with some modifications).

How to use The goal of the evaluations is not memorization, but rather understanding. If you have attended lectures, done the labs and assignments, and are prepared to think, rather than regurgitate, you will very likely do well on the evaluation.

The questions below are provided so that you may verify your understanding of the various concepts and languages, and where necessary refresh/fill-in your knowledge. Answers are not provided, because this should not be an exercise in memorization and regurgitation. As you review, you have a computer available to you, so all the answers are available to you.

For each question, you should evaluate what you believe to be a correct answer, and then use the computer to verify. The questions fall into 3 categories:


1. Programming questions. For this I encourage you to first program a solution on paper - emulating the test environment - and then enter and debug it on the computer to verify it.
2. Tracing questions. Work through the code associated with several questions and write down your answers to the questions. Only then, evaluate the provided code to verify your answers. Simply evaluating the code and memorizing the answers will not help you nearly as much!
3. Theory questions. Answer the questions, then review your notes or the provided slides to verify the answer.

If a question says “Not applicable” it means we did not cover the material in sufficient detail to make the question reasonable to include on the evaluation. See the allQuestions file which includes everything.

If you find a question ambiguous, please let the professor know, so it can be made clearer.

ast-mc


The abstract syntax tree for an expression is shown to the right. Select the correct concrete syntax for this tree in each of the following expression syntaxes, using no more parentheses than required.



- Q1. prefix
 - Q2. postfix
 - Q3. Java
 - Q4. APL
 - Q5. Smalltalk
-

ast


Q6. (4 marks) The abstract syntax tree for an expression is shown to the right. Show the concrete syntax for this tree in each of the following expression syntaxes, using no more parentheses than required.

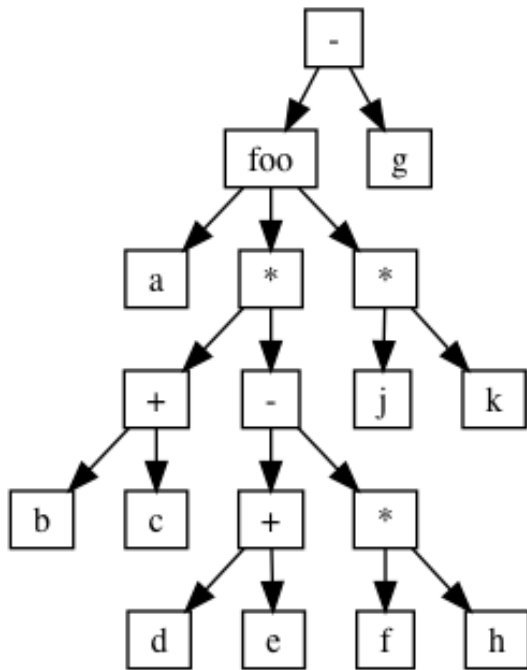

Prefix: Postfix: Infix, Java precedence rules: infix, left-to-right precedence:

ast2


Q7. (4 marks) The abstract syntax tree for an expression is shown to the right. Show the concrete syntax for this tree in each of the following expression syntaxes, using no more parentheses than required.

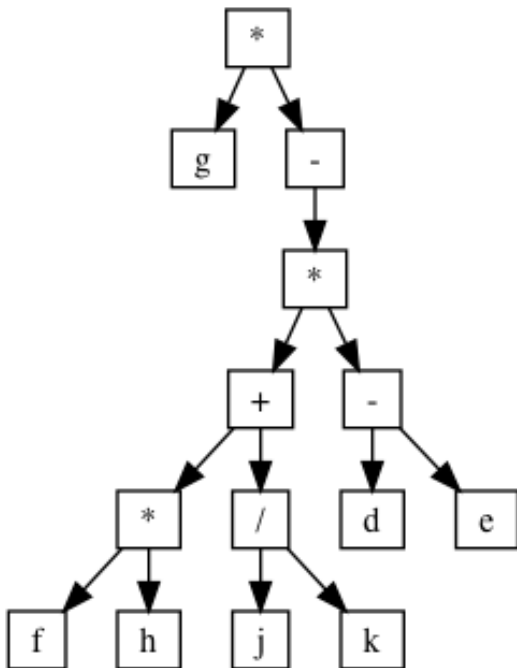

Prefix: Postfix: Infix, Java precedence rules: infix, left-to-right precedence:

ast3

Q8. (4 marks) The abstract syntax tree for an expression is shown to the right. Show the concrete syntax for this tree in each of the following expression syntaxes, using no more parentheses than required. Where required, use “negated” for unary negation.

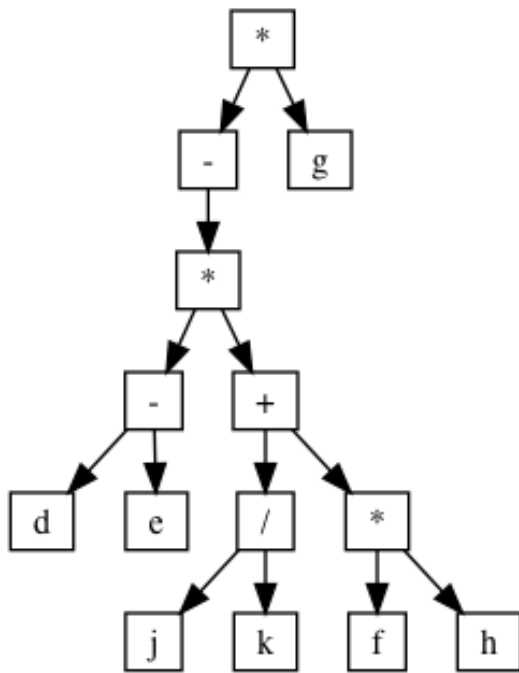

Prefix: Postfix: Infix, Java precedence rules: infix, Smalltalk precedence:

ast4

Q9. (4 marks) For the following expressions, show the abstract syntax tree.

Prefix:

(/ (- (+ a b) (* c d (- e)) (+ f g)) h)

Infix, Java precedence rules:

- (a * b + c * (d - (e * f + (g * h))))

Postfix: (_ is unary minus)

a b + c d + * e f + _ * g h - *

Infix, left-to-right precedence rules:

- (a * b + c * (d - (e * f + (g * h))))

categories

Languages can be in several categories, including: OO (Object-Oriented), Imperative, Functional, Parallel, and Declarative. Languages can also have statements or everything can be an expression. Languages can be statically type, dynamically typed, or untyped. Finally, languages can have properties such as functions, methods, reflection, and closures.

In each of the following questions choose the single best answer. There may be more than one correct answer, and there may be answers that will give part marks. If the same question is asked twice, there are at least 2 correct answers and you must answer a different property

- Q10. Smalltalk is
- Q11. Smalltalk has
- Q12. Smalltalk has
- Q13. Elixir is
- Q14. Elixir has
- Q15. Elixir has
- Q16. Haskell is
- Q17. Haskell has
- Q18. Haskell has
- Q19. Rust is
- Q20. Rust has
- Q21. Rust has

for the two questions.

closure-output

In the following code for the visitor pattern,

```
;;; handles orange and green baskets
;;; (:orange n-kumquats weight)
;;; (:green basket basket)
;;; e.g. (:green (:orange 15 701.126) (:green (:orange 5 10) (:orange 7)))
;;;      - 5 nodes, 27 kumquats, 711.126 kilos
;;;      (:green (:orange 10))
;;;      - 2 nodes. 10 kumquats, 0 kilos
(defn visit [ofield gfield]
  (fn v [[tag l r :as basket]]
    (case tag
      :green (+ (or (gfield basket)) (v l) (v r))
      :orange (or (ofield basket) 0)
      0)))

(def zero (fn [-] 0))
(def one (fn [-] 1))
(def f1 (fn [[- x]] x))
(def f2 (fn [[x]] x))
(def f3 (fn [[- - x]] x))
(def node-count (visit n1 n2))
(def kums-count (visit k1 k2))
(def weight-count (visit w1 w2))
```

the ofield and gfield parameters must be defined appropriately for the particular visitor. You must figure them out for node-count, kums-count and weight-count.

- Q22. What is n1
Q23. What is n2
Q24. What is k1
Q25. What is k2
Q26. What is w1
Q27. What is w2
Q28. What language?
-

closure-output2

In the following code,

```
(defn f [g h]
  (fn v [[tag l & rest]]
    (case tag
      :g (g l (h (v rest)))
      :h (g (h l) (v rest))
      1)))
(def f0 (f + +))
(def f1 (f + -))
(def x0 (f0 [1 2 3 4]))
(def x1a (f0 [:g 1 :h 2 :h 3 :g 4]))
(def x1b (f0 [:g 1 :g 2 :h 3 :g 4]))
(def x2a (f1 [:g 1 :h 2 :h 3 :g 4]))
(def x2b (f1 [:g 1 :g 2 :h 3 :h 4]))
(def x3 ((f * +) [:g 1 :h 2 :h 3 :g 4]))
```

What will be the following resulting values?

- Q29. What is x0?
Q30. What is x1a?
Q31. What is x1b?
Q32. What is x2a?
Q33. What is x2b?
Q34. What is x3?
Q35. What language is this?
-

combinators-scala

Q36. (2 marks) In the Scala expression "S" ~> "'" ~> "[a-zA-Z]+"" .r <~ "'", all the things with double-quotes are parsers. What do the things with tildes (~, ~>, <~ and similar) do? What is the resulting expression?

combinators2-scala

In the Scala expression "S" ~> "'" ~> "[a-zA-Z]+"" .r <~ "'", what are:

- Q37. things with quotes?
Q38. things with tildes?
Q39. the whole expression?
-

elixir-concat

Q40. (3 marks) Extend the following code, to define the function `myConcat` which takes two lists and returns the first concatenated to the front of the second. E.g. `myConcat([1,2,3,4],[20,21,22])` produces `[1, 2, 3, 4, 20, 21, 22]`

Write the full recursive function. I.e. DO NOT use `++` or `Enum.concat`.

```
defmodule Test do
  def myConcat(
```

elixir-deal

Q41. (5 marks) Extend the following Elixir code, to define the function `deal` that takes a list and deals it in order to 4 lists which will be returned in a tuple. For example if called with the list `[1,2,3,4,5,6]` it would return the lists `[1,5]`, `[2,6]`, `[3]`, and `[4]`.

```
defmodule Deal do
  def deal(
```

elixir-lazy

Q42. (2 marks) Discuss the value of eager and lazy evaluation in the context of Haskell (think monads). Discuss the value of eager and lazy evaluation in the context of Elixir (think `Enum`, `Stream`).

elixir-match

Q43. (3 marks) Extend the following code, to define the function `listCounts` which takes a list and returns the list of element counts. Elements of the list can be 2-tuples, 3-tuples, or flat lists, and the element count is the sum of the values in the element. E.g. `listCounts([1, 2], {3, 4, 5}, [1, 2])` would produce the list `[3,12,6,11]`.

```
defmodule Test do
  def listCounts(
```

elixir-moveLeft

Q44. (4 marks) Extend the following code, to define the function `canMoveLeft` which takes a Tetris piece and returns `true` if the piece could move left. The only consideration is whether the piece would fall off the left side of the board (the board has columns `1..n`). Also define the function `moveLeft` that returns the same piece or the piece moved left one step if that's legal (using the `canMoveLeft` function).

A piece is a tuple composed of: the atom `piece`, a pair for the centre point, a list of pairs for the individual cells as offsets from the centre, and a colour.

```
defmodule Tetris do
  def canMoveLeft(
```

elixir-objects

Q45. (5 marks) In Elixir objects can be emulated by processes, where the object loops receiving messages and replying to them. For example:

```
p1=Pawn.new(),
Obj.call(p1,{:goto,1,2}),
1=Obj.call(p1,:x),
2=Obj.call(p1,:y),
Obj.call(p1,{:moveDelta,3,1}),
4=Obj.call(p1,:x),
3=Obj.call(p1,:y).
```

Add the necessary code to the following to support the API used above for the object pawn:

```
defmodule Obj do
  def call(obj,msg) do
    send obj,{self(),msg}
    receive do
      Response -> Response
    end
  end
end

defmodule Pawn do
  def new(), do: spawn(__MODULE__,:init,[])

  def init() do
```

elixir-output

In the following code,

```
defmodule Output do
  defp abc(x) do
    cond do
      x > 0 -> 1
      x < 0 -> -1
      true -> 0
    end
  end

  defp fgh(x,y), do: x * y
  defp n(x,x), do: []
  defp n(x,y), do: [y|n(x,y+1)]
  defp n(x), do: n(x,-x)
  def ghi() do
    for x<-1..4, y<-n(4), y<3, x>1, do: x+y
  end
  def hij() do
    ghi() |>
    Enum.take(7) |>
    Enum.map(fn x -> fgh(abc(x),x) end)
  end
end
```

```
end
[x1 , x2 , x3 | x4]=Output . ghi ()
[y1 , y2 , y3 | y4]=Output . hij ()
```

- Q46. What is x1?
Q47. What is x2?
Q48. What is length(x4)?
Q49. What is y1?
Q50. What is y2?
Q51. What is length(y4)?
Q52. What language is this?
-

elixir-output2

In the following code,

```
defmodule Output2 do
  def abc(x) do
    y = spawn_link(__MODULE__, :n, [self()])
    send y, x
    receive do
      z -> z
    end
  end
  def n(z) do
    receive do
      v -> send z, n(v*v, v)
    end
  end
  defp n(x, x), do: [x]
  defp n(x, y), do: [y | n(x, y+y)]
end
[x1 , y1 | z1]=Output2 . abc (2)
[x2 , y2 | z2]=Output2 . abc (16)
```

- Q53. What is x1?
Q54. What is y1?
Q55. What is length(z1)?
Q56. What is x2?
Q57. What is y2?
Q58. What is length(z2)?
Q59. What language is this?
-

elixir-output3

In the following code,

```
defmodule Output3 do
  def abc(x), do: n(x)
  defp n(v), do: n(v*v, v)
  defp n(x, x), do: [x]
```

```
defp n(x,y), do: [y | n(x,y+y)]
end
[x1,y1 | z1]=Output3.abc(2)
[x2,y2 | z2]=Output3.abc(16)
```

Q60. What is x1?

Q61. What is y1?

Q62. What is length(z1)?

Q63. What is x2?

Q64. What is y2?

Q65. What is length(z2)?

Q66. What language is this?

elixir-server

Q67. (4 marks) Extend the following code, defining the loop function so that the process receives a pair of values and replies with the difference between them and the sum of them to the originating process.

```
defmodule ElixirServer do
  def new(), do: spawn(loop)
  def init() do
    x = new()
    send x, {self(), 4, 2}
    {2,6}=receive do x -> x end
    send x, {self(), 5, 5}
    {0,10}=receive do x -> x end
  end
  def loop() do
```

elixir-simpleExpression

Q68. (5 marks) For the following expressions in Elixir, what is the result? (could be a number, string, list, or error) (assume that the Enum module is loaded)

```

hd [3,4,5] : _____
tl [3] : _____
any?(&(&1<2), [0,1,2,3]) : _____
all?([0,1,2,3], &(&1<2)) : _____
reduce([1,2,3], 6, &(&1+&2)) : _____
1/2 : _____
hd [1,1*2,1/(2-2),3+7] : _____
:x=="x" : _____
true==:true : _____
3<3==false : _____
[1,2,3]|>filter(&(&1)) : _____
_____

```

erlang-objects

Q69. (5 marks) In Erlang objects can be emulated by processes, where the object loops receiving messages and replying to them. For example:

```

Call=fun pawn:call/2,
P1=pawn:new(),
Call(P1, {goto,1,2}),
1=Call(P1,x),
2=Call(P1,y),
Call(P1, {moveDelta,3,1}),
4=Call(P1,x),
3=Call(P1,y).

```

Add the necessary code to the following to support the API used above for the object pawn:

```

-module(pawn).
-export([new/0,init/0,call/2,test/0]).
new() -> spawn(pawn,init,[]).
call(Obj,Msg) -> Obj ! {self(),Msg},
                receive
                    Response -> Response
                end.
init() ->
_____

```

erlang-output

In the following code,

```
-module(output).
-export([hij/0,ghi/0,n/1,abc/1]).
abc(X) -> if
    X > 0 -> 1;
    X < 0 -> -1;
    true -> 0
end.
fgh(X,Y) -> X * Y.
n(X,X) -> [];
n(X,Y) -> [Y|n(X,Y+1)].
n(N) -> n(N,-N).
ghi() -> [X+Y||X<-[1,2,3,4],Y<-n(4),Y<3,X>1].
hij() -> lists:map(fun(X) -> fgh(abc(X),X) end,
    [X+Y||X<-[1,2,3,4],Y<-n(4),Y<3,X>1]).
[X1,X2,X3,X4|_] = output:ghi().
[Y1,Y2,Y3,Y4|_] = output:hij().
```

- Q70. What is X1?
Q71. What is X2?
Q72. What is X3?
Q73. What is X4?
Q74. What is Y1?
Q75. What is Y2?
Q76. What is Y3?
Q77. What is Y4?
Q78. What language is this?
-

erlang-output2

In the following code,

```
-module(output2).
-export([n/1,abc/1]).

abc(X) ->
    Y = spawn_link(output2,n,[self()]),
    Y ! X,
    receive
        Z -> Z
    end.
n(X,X) -> [X];
n(X,Y) -> [Y|n(X,Y+Y)].
n(Z) -> receive N -> Z ! n(N*N,N) end.

[X1,Y1|Z1]=output2:abc(2).
[X2,Y2|Z2]=output2:abc(8).
```

- Q79. What is X1?
Q80. What is Y1?
Q81. What is length(Z1)?
Q82. What is X2?
Q83. What is Y2?
Q84. What is length(Z2)?
Q85. What language is this?
-

extensibility

Q86. (8 marks)

Explain the primary form(s) of extensibility for each of the following languages:

Smalltalk: Elixir: Haskell: Rust:

fold

Q87. (12 marks)

For each of the languages we studied, write a function called `fold` that takes a function `f`, and initial value `it` and a list `l` and returns the result that is produced by applying the function to the initial value and the first element of the list, then to that result and the second element of the list, and so on. For example, the code (in some made-up Javascript-like language):

```
function add(a1,a2) {return a1+a2*a2;}  
fold(add,5,[2,3,4])
```

would produce the value: 34. If the language doesn't have lists, use arrays.

Smalltalk: Elixir: Haskell: Rust:

haskell-func1

Q88. (3 marks) Write the simplest Haskell function that has the following type signature:

$$\text{pairList} :: (a \rightarrow b) \rightarrow (b \rightarrow c) \rightarrow [a] \rightarrow [(b, c)]$$

haskell-func2

Q89. (5 marks) Given the following Haskell definition, define the instance of `Eq` that has the natural semantics with the addition that `A` is equal to `C 0` and `D []`, and `B` is equal to `C 1`. Remember that equality is symmetric (i.e. $x == y \iff y == x$).

```
data Abc = A | B | C Integer | D [Abc]  
instance Eq Abc where  
    A == A = True
```

haskell-monad

Q90. (1 marks) What is a monad?

haskell-monad2

Q91. (2 marks) Why doesn't a language like Java have monads?

haskell-output

In the following code,

```
let x = head (drop 3 [(x,y) | x <- [1..], y <- [3..4]])
let y0:z0 = drop 4 [(x,y) | x <- [1..], y <- [3..4]]
let y1:z1 = drop 4 [(x,y) | y <- [1..4], x <- [1..3]]
let (y2,-):z2 = (take 2 (drop 4 [(x,y) | x <- [1..3], y <- [1..4]]))
let (y3,-):z3 = (take 2 (drop 4 [(x,y) | x <- [1..3], y <- [1..4], x<y]))
```

Q92. What is x?

Q93. What is y0?

Q94. What is length z0?

Q95. What is y1?

Q96. What is length z1?

Q97. What is y2?

Q98. What is z2?

Q99. What is y3?

Q100. What is z3?

Q101. What language is this?

haskell-output2

In the following code,

```
let d x = x+x :: Int
let f x = x : f (d x)
let x0:x1:x2 = f 3
let y0:_ = x2
let g x y = (x,y x) : g (y (y x)) y
let z0:z1:z2 = take 7 (g 3 (+2))
```

Q102. What is x0?

Q103. What is x1?

Q104. What is length x2?

Q105. What is y0?

Q106. What is z0?

Q107. What is z1?

Q108. What is length z2?

Q109. What language is this?

Q110. What is the type of f?

Q111. What is the type of g?

haskell-types

Q112. (5 marks) What is type inference, and why would you want it in a language? Use type inference to determine the type signature of:

abc f g w = f w g

ghi f g = map (\y -> y g) f

jkl f g w = w (map g f)

haskell-typesmc

For each of the definitions below, what is the type of z?

Q113. $\text{let } z = \lambda x \rightarrow x$

Q114. $\text{let } z = \lambda x \rightarrow x: []$

Q115. $\text{let } z \ x = [x]$

Q116. $\text{let } z \ x \ y = x:y$

Q117. $\text{let } z \ y \ x = x:y$

Q118. $\text{let } z \ x \ y = [x \ y]$

lang-mc

In each of the following questions choose the single best answer. There may be more than one correct answer, and there may be answers that will give part marks. If the same question is asked twice, there are at least 2 correct answers and you must answer a different language for the two questions.

Which language ...

- Q119. allows unrestricted mutation?
- Q120. can generate native code?
- Q121. can generate native code?
- Q122. doesn't have garbage collection?
- Q123. doesn't have list comprehensions?
- Q124. doesn't have list comprehensions?
- Q125. dynamic dispatch for polymorphic ops?
- Q126. generates code for polymorphic ops?
- Q127. has control structures as statements?
- Q128. has syntactic features to support DSLs?
- Q129. has type classes?
- Q130. has traits?
- Q131. has traits?
- Q132. is built on a process model?
- Q133. is designed to support multiple cores?
- Q134. is pure OO?
- Q135. has pure functional functions?

- Q136. is pure functional?
 - Q137. is statically typed?
 - Q138. is statically typed?
 - Q139. recognizes tail recursion?
 - Q140. recognizes tail recursion?
 - Q141. runs only on JVM/CLR?
 - Q142. simulates multiple-inheritance for code?
 - Q143. uses lazy evaluation?
 - Q144. uses monads for mutation?
 - Q145. uses prefix expression?
 - Q146. uses type inference?
 - Q147. uses type inference?
-

lang-preferred

Q148. (4 marks) Write a short essay (in the space provided) explaining which of the languages we studied – Smalltalk, Elixir, Haskell, and Rust – is your favourite and give comparisons with the others and with Java and C. There is no “right” answer; marks will be assigned for the quality of the reasoning and the understanding of the trade-offs.

map2

Q149. (12 marks)

For each of the languages we studied, write a function called `map2` that takes a function `f` and 2 lists `l1` and `l2` and returns the list that is produced by applying the function to one element from each of the lists in turn. For example, the code (in some made-up Javascript-like language):

```
function add(a1,a2) {return a1+a2;}
map2(add, [1,2,3], [4,5,6])
```

would produce the list: `[5,7,9]`. If the language doesn't have lists, use arrays.

Smalltalk: Elixir: Haskell: Rust:

multi-func1

Q150. (8 marks) Write the simplest function that has the following type signature (or equivalent) and works for all sizes of list:

```
pairList :: (a -> b) -> (b -> c) -> [a] -> [(b,c)]
```

In Smalltalk: In Elixir: In Haskell: In Rust:

multiprocessing

Q151. (6 marks) Not applicable

open-classes

Q152. (3 marks) Smalltalk is a “pure object-oriented” language. What is meant by this term? In pure OO languages, you often want to add methods to standard types, including Object. Why?

parallelism

Q153. (4 marks) One of the dominant issues of the next few years will be the end of faster processors and the rise of multiple cores. Explain the problem this presents at the processor/language level. Describe various approaches programming languages might adopt to address the problem.

rank-extensibility

Q154. (4 marks) Rank the languages we studied, with respect to extensibility.

Smalltalk Elixir Haskell Rust

Justify that ranking (note that “It’s more like what I’m used to” is not a justification).

rank-orthogonality

Q155. (4 marks) Rank the languages we studied, with respect to orthogonality.

Smalltalk Elixir Haskell Rust

Justify that ranking (note that “It’s more like what I’m used to” is not a justification).

rank-simplicity

Q156. (4 marks) Rank the languages we studied, with respect to simplicity.

Smalltalk Elixir Haskell Rust

Justify that ranking (note that “It’s more like what I’m used to” is not a justification).

ruby-output

For the following code:

```
def abc(x)
  y = 0
  t = 0
  while t < x
    y = y + yield(t)
    y = yield(y+1)
    t = t + 1
  end
  return y
end
```

What do the following expressions produce?

Q157. `abc 1 do |x| x+1 end`

Q158. `abc 2 do |x| x+1 end`

Q159. `abc 1 do |x| x+2 end`

Q160. `abc 2 do |x| x+2 end`

Q161. `abc 1 do |x| x*2 end`

Q162. `abc 2 do |x| x*2 end`

Q163. What language is this?

ruby-yield

Q164. (5 marks) In ruby there is a powerful expression called `yield`. What does it do? Show a possible implementation of `Array>>each` that uses `yield`.

rust-dice

Q165. (5 marks) Given the following struct definition in Rust, define a minimal implementation with a function called `new` that takes 1 parameter - a `Vec` of unsigned dice rolls - and returns a new object, and a method called `next` that, each time it is called with no parameters, it returns a `usize` value for the next dice roll for the object, wrapping around as necessary. For example, if created with `1,2,3,2` it would produce the sequence `1,2,3,2,1,2,3,2,1,2,3,2,1,2,3,2,...`

```
struct Dice {
    rolls : Vec<u8>,
    roll : usize ,
}
impl Dice {
```

rust-output

In the following code,

```
let s = "Hello World!";
let mut r = String::from(s);
r.push_str(" from me");
let mut p = (&r).split_whitespace();
let q = p.next().expect("no keyword");
let o = p.collect::<Vec<->>();
let mut x : Vec<-> = (3..6).collect();
// x.push(-5);
let z = x.remove(1);
let s = z+x.len();
let w : Vec<->= x.iter().map(|x| (*x,s)).collect();
let (p,q)=w[0];
```

what do the following expressions evaluate to if printed or what type are they? (It may help you to know that the commented line would cause an error).

- Q166. type of s
 - Q167. type of x
 - Q168. type of q
 - Q169. w.len()
 - Q170. o.len()
 - Q171. x
 - Q172. What language is this?
-

rust-safety

Q173. (5 marks) Compare and contrast Rust and C, explaining C issues that are addressed by Rust. Explain how Rust handles moving, borrowing, and copying to fulfil its safety promise.

scala-func2

Q174. (5 marks) Define the Scala case classes to mimic the Haskell declaration:

```
data Abc = A | B | C Integer | D [Abc]
instance Eq Abc where
    A == A = True
```

and define the necessary equals functions that have the natural semantics with the addition that A is equal to C(0) and D(List()), and B is equal to C(1). Remember that equality is symmetric (i.e. $x==y \iff y==x$). Here is a start on the code:

```
object Classes {
    abstract class Abc
```

scala-output

Q175. (10 marks) What does the following code do?

```
import scala.language.postfixOps
import scala.util.parsing.combinator._

// try: java visitor 'O(10,12.5)' 'G(O(15,701.125)G(O(5,10),O(7)))' 'G(O(10))'

object visitor {
    sealed abstract class Basket
    case class GreenBasket(b1:Basket = null, b2:Basket = null) extends Basket
    case class OrangeBasket(nKumquats: Int = 0,kilos:Double = 0.0) extends Basket

    class BasketParsers extends RegexParsers {
        lazy val integer: Parser[Int] = """\d+""".r ^^ { _.toInt }
        lazy val floatNum: Parser[Double] = """\d+(\.\d*)?""".r ^^ { _.toDouble }
        lazy val green: Parser[Basket] = 'G' ~> '(' ~> (basket ~ ((','?) ~> basket)
            y => y match {
                case Some(x) => x._2 match {
                    case Some(z) => new GreenBasket(x._1,z)
                    case None => new GreenBasket(x._1)
                }
            }
        case None => new GreenBasket()
```

```

    }}
    lazy val orange: Parser[Basket] = 'O' ~> '(' ~> (integer ~ ((' , ?) ~> f
    y => y match {
      case Some(x) => x._2 match {
        case Some(z) => new OrangeBasket(x._1, z)
        case None => new OrangeBasket(x._1)
      }
      case None => new GreenBasket()
    }}
    lazy val basket: Parser[Basket] = orange | green
    def parse(text : String): ParseResult[Basket] = {
      parseAll(basket, text)
    }
  }

  def nodeCount(b:Basket):Int = b match {
    case GreenBasket(b1,b2) => nodeCount(b1)+nodeCount(b2)+1
    case OrangeBasket(_,_) => 1
  }
  def kumquatCount(b:Basket):Int = b match {
    case GreenBasket(b1,b2) => kumquatCount(b1)+kumquatCount(b2)
    case OrangeBasket(n,_) => n
  }
  def weight(b:Basket):Double = b match {
    case GreenBasket(b1,b2) => weight(b1)+weight(b2)
    case OrangeBasket(_,w) => w
  }

  def main(args: Array[String]) {
    args.foreach { arg =>
      println("For: "+arg);
      val parse = (new BasketParsers).parse(arg)
      if (parse successful) {
        val basket:Basket = parse.get
        println("    Node count    is "+nodeCount(basket))
        println("    Kumquat count is "+kumquatCount(basket))
        println("    Weight          is "+weight(basket))
      }
      else {
        println("    Can't parse")
      }
    }
  }
}
val i = 3

```

Q176. What language is this?

scala-output2

In the following code,

```

def g2[a,b](f:(a,b)=>Boolean, pairs:List[(a,b)], init:List[(a,b)]):List[(a,b)]
  pairs match {
    case ((x,y)::rest) =>
      if (f(x,y)) pairs.head::g2(f,rest,init) else g2(f,rest,init)
    case _ => init
  }
def g[a,b](fs:List[(a,b)=>Boolean], pairs:List[(a,b)], init:List[(a,b)]=List()
          List[(a,b)] =
  fs match {
    case List() => init
    case (f::fs) => g2(f,pairs,g(fs,pairs,init))
  }
val nums=List((1,2),(2,2),(3,2),(3,4),(2,3))
val less=(_:Int) < (_:Int)
val lesseq=(_:Int) <= (_:Int)
val grt=(_:Int) > (_:Int)
val q::r::s::_=g(List(less,grt),nums)
val w::x::y::z=g(List(grt,lesseq,less),nums)

```

Q177. What is q?

Q178. What is r?

Q179. What is s?

Q180. What is w?

Q181. What is x?

Q182. What is y?

Q183. What is length z?

Q184. What language is this?

semantic

Q185. (6 marks) Explain the difference between syntax, semantics, and pragmatics in programming languages. Is it possible to have 2 languages with different syntax, but the same semantics? If not, explain why not; if so, explain and give an example of two such languages. Is it possible to have 2 languages with different semantics, but the same syntax? If not, explain why not; if so, explain and give an example of two such languages.

smalltalk-func2

Q186. (10 marks) Define the Smalltalk classes to mimic the Haskell declaration:

```

data Abc = A | B | C Integer | D [Abc]
instance Eq Abc where
  A == A = True

```

and define the necessary = functions that have the natural semantics with the addition that A is equal to C(0) and D(List()), and B is equal to C(1). Remember that equality is symmetric (i.e. $x==y \iff y==x$). Here is a start on the code:

```

Object subclass: #Abc
  instanceVariableNames: ''
  classVariableNames: ''

```

```

isZero
  ↑ false
isOne
  ↑ false
isEmpty
  ↑ false
contains: otherValue
  ↑ false

```

```

Abc subclass: #A
  instanceVariableNames: ''
  classVariableNames: ''
  isZero
    ↑ true
  = other
    (other isKindOf: Abc) ifFalse: [↑ false].
    other isZero ifTrue: [↑ true].
  ↑ other isEmpty

```

smalltalk-messages

Q187. (3 marks) When you send a message to a Smalltalk object, explain what happens if:

- the object has a method by that name
- the object does not have a method by that name, but its superclass does
- the object nor any of its superclasses have a method by that name

smalltalk-output

In the following code,

```

Object subclass: #Abc
  instanceVariableNames: 'abc_def_ghi'
  classVariableNames: ''
initialize
  self abc: 39.
  self def: 17.
abc
  ↑ abc
abc: x
  abc := x
def
  ↑ self abc + 3
def: x
  def := x

Abc class
  instanceVariableNames: 'operator'

```

```

abc
  ↑ self new abc + 6
def
  | temp |
temp := OrderedCollection new.
self new def timesRepeat: [ temp add: temp size - 10 ].
  ↑ temp
ghi: a
  | i |
i := self new.
  ↑ {i abc. i def} collect: a

```

what do the following expressions evaluate to if printed? (Note the “↑” is really “^”.)

- Q188. `abc new`
 Q189. `abc new abc`
 Q190. `abc abc`
 Q191. `abc def size`
 Q192. `abc def last:2`
 Q193. `abc ghi:[:x| x+3]`
 Q194. What language is this?

smalltalk-pieces

Q195. (8 marks) Write the code for the method `height` which returns the height of the piece (from the pivot point to the top of the piece, including the pivot row), and the method `rotate:` which is passed the number of 90-degree clockwise turns to make. Assume the points are represented as `Point` values relative to the pivot point (such as `{-100. 000. 100. 200}` for the horizontal bar. Also assume that points have methods `x` and `y` that return the `x` and `y` values, a method `@` which constructs points, and a method `rotatedClockwise` that will return the new point with the coordinates of the original point rotated 90-degrees clockwise.

```

Object subclass: #Piece
  instanceVariableNames: 'squares'

```

smalltalk-simpleExpression

Q196. (5 marks) For the following expressions in Smalltalk, what is the result? (could be a number, character, string, class, or error)


```

2+3*5 : _____
7/4 : _____
#(3 4 5) at: 1 : _____
3>4 raiseTo: 2 : _____
3>4 negated : _____
#(abc def) first second : _____
[: x | x + 1] value: 3 : _____
12 class class superclass = 2 class superclass class : _____
3<4 class : _____
3 negated class : _____

```

smalltalk-suitvalue

Q197. (5 marks) Write the Smalltalk code for the method `points` which returns the point value of a suit within a bridge hand. Remember that a void is worth 3, a singleton (1 card) 2, a doubleton (2 cards) 1, Ace 4, King 3, Queen 2, Jack 1. The `HandSuit` object contains cards from just one suit (stored in the instance variable `cards`). You might want to define additional classes such as `Card`. Feel free to define any helper methods (as long as they are complete).

```

Object subclass: #HandSuit
  instanceVariableNames: 'cards'

```

smalltalk-write

Q198. (6 marks) In a cell-based game, such as `LightsOut`, `MineSweeper`, or the `GameOfLife`, we need to know how many neighbour cells are occupied. Write the code for the method `neighboursOfCell` which returns a collection of non-nil neighbours. Write the code for the method `countNeighbours` to return the number of occupied neighbours (you will want to use `neighboursOfCell`). You can assume that the `occupied`, `above`, `below`, `left`, and `right` instance variables have already been set up properly Use the following code as a start:

```

Object subclass: #Cell
  instanceVariableNames: 'neighbours below above left right occupied'
add: aCell
  aCell ifNotNil: [ neighbours add: aCell ]
above "returns the Cell object above this one (or nil if at top border)"
  ↑ above
below "returns the Cell object below this one (or nil if at bottom border)"
  ↑ below
left "returns the Cell object left of this one (or nil if at left border)"
  ↑ left

```

<code>right</code>	<i>"returns the Cell object right of this one (or nil if at right border)"</i>
↑ <code>right</code>	
<code>occupied</code>	
↑ <code>occupied</code>	<i>" true if occupied, false otherwise "</i>

type-inference

Q199. (5 marks) What is type inference? What is the advantage of type inference? What is the type signature of the following function?

```
abc f x = f (1 + x)
```

Show reasonable inference steps. What is the type signature of the following function?

```
ghi f g x = f (g (f x))
```

Show reasonable inference steps. What is the type signature of the following function?

```
jkl x f y = f (map (+y) x)
```

Show reasonable inference steps.

typing

Q200. (5 marks) Explain the difference between static and dynamic type systems in languages. Provide and explain a context where dynamic types are better, and explain why. Provide and explain a context where static types are better, and explain why.

typing2

For each of these languages that you've studied at Ryerson, say whether it is untyped, has a dynamic type system, or has a weak, medium or strong static type system.

Q201. C

Q202. Smalltalk

Q203. Haskell

Q204. Java

Q205. Elixir

Q206. Rust

typing3

Q207. (3 marks) Explain the difference between static and dynamic type systems in languages.

typing4

Q208. (4 marks) Explain why Haskell and Rust have such a complicated type system compared to C, Java or Elixir, with particular reference to type-inference and type classes/traits.
